

# AC-1100

Card Terminal with Camera & Bluetooth Mobile Key



[Intuitive GUI]



Face Detection and Perception



VoIP Supported




Compatible with Bluetooth-enabled mobile key system

## Features

- |   |  |   |  |
|---|--|---|--|
|  | <b>Bluetooth Support</b> <ul style="list-style-type: none"> <li>· Bluetooth-enabled mobile key solution</li> <li>· UNIS-B : App for administrators</li> <li>· V-CARD : App for mobile key users</li> </ul>                       |  | <b>VoIP Supported</b> <ul style="list-style-type: none"> <li>· IP BX Network(SIP)</li> </ul>   |
|  | <b>4.0" Touchscreen LCD &amp; GUI</b> <ul style="list-style-type: none"> <li>· Large screen and intuitive UI for easy use</li> </ul>   |  | <b>Face Detection</b> <ul style="list-style-type: none"> <li>· Image capture for higher security</li> </ul>  |
|  | <b>Multi-Language Support</b>  |  | <b>Built-in Camera / W FLASH</b> <ul style="list-style-type: none"> <li>· Image acquisition during access</li> <li>· VGA Color</li> </ul>          |
|  | <b>Open Supervised Device Protocol (OSDP)</b> <ul style="list-style-type: none"> <li>· communication protocol support that allows peripheral devices to interface with control panels or other security mgmt. systems</li> </ul> |  | <b>Easy Data Transfer (USB ON-THE-GO)</b> <ul style="list-style-type: none"> <li>· Easy data transfer and firmware upgrade by using USB</li> </ul> |

## Mobile Key Solution

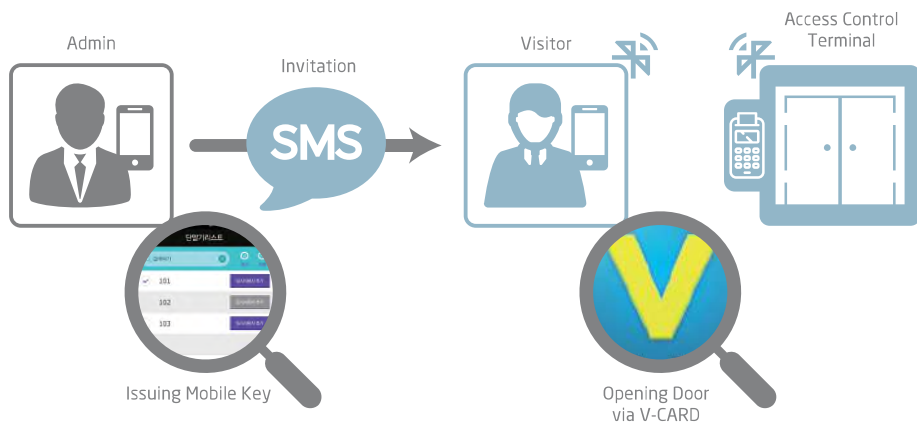

## Specification

<b>CPU</b>	1 GHZ Single core	<b>Memory</b>	512MB RAM + 8GB eMMC(NAND)
<b>LCD</b>	4 Inch Color Touch LCD(Resistive)	<b>Max Users</b>	200,000
<b>Power Consumption</b>	12V, Max 580mA (7W)	<b>Log Capacity</b>	Event Logs 1,000,000 / Image Logs 15,000
<b>Communication</b>	TCP/IP, RS232, RS485, Wiegand In/Out, Bluetooth, USB, Wi-Fi(Optional)	<b>Certificates</b>	KC, CE, FCC, RoHS
<b>Dimension</b>	80 x 153 x 18.2 mm		
<b>RFID Card Option</b>	125KHz-EM, 13.56MHz Smart Card, Felica, SAM Slot		

